


HAIKU WITH UV-C TECHNOLOGY

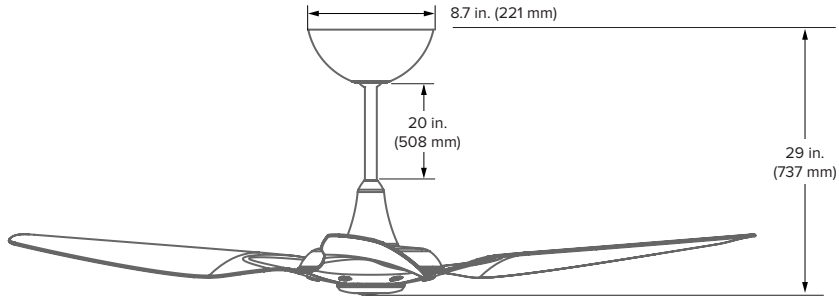


Shown with the 20 in. (508 mm) downrod. See the full fan cut sheet for a complete list of fan heights with optional downrods.

Technical Specifications

Operating Voltage	Operating Current	Input Power	Peak Wavelength	Maintenance ¹	Operating Temperature
12–24 VDC	0.9 A–1.9 A	21.2–22.4 W	260–270 nm	Replace diodes annually (recommended)	32° to 104 °F (0° to 40 °C)

Construction and Controls

Premium Components	Finish	Controls	Environment	Certifications
265 nm UV-C diodes Custom aluminum heatsink	Matches fan motor finish	On/Off Remote control Clean Mode with the Haiku mobile app	Indoor use only	 UL 1598 CSA C22.2 No. 250

Ordering Information


Diameter	Mount	Airfoil Material, Motor Finish	Country	Motor	Gen	Airfoil Finish (Aluminum Only)
52 inch: S3127 60 inch: S3150 84 inch: B3213	52 inch: X2 60 inch: X2 84 inch: X4	Aluminum, Black: AB Aluminum, ORB: AO Aluminum, SN: AS Aluminum, White: AW Bamboo Caramel, Black: BC Bamboo Caramel, ORB: BCO Bamboo Caramel, SN: BCS Bamboo Caramel, White: BCW Bamboo Cocoa, Black: BW Bamboo Cocoa, ORB: BWO Bamboo Cocoa, SN: BWS Bamboo Cocoa, White: BWW	North America: 0402	52 in: C 60 in: C 84 in: D	01	Black: F258-G9 White: F259-G9 Brushed Copper: F523-G9 Brushed Aluminum: F531-G9 Satin Nickel: F470-G9 Oil-Rubbed Bronze: F471-G9 Driftwood: F772-G9 Chrome: F779-G9

UV-C Light


Finish Options

Black: 009785-258
White: 009785-259
Satin Nickel: 009785-470
Oil-Rubbed Bronze: 009785-471


Finish Options



Oil-Rubbed Bronze



Satin Nickel



White



Black



¹ Big Ass Fans recommends replacing the UV-C LED board annually. To preserve UV-C capabilities, the LEDs are not covered by a lens.
Big Ass Fans recommends cleaning the LED board monthly with compressed air. Do not touch the LEDs with bare hands.

² EPA Est. 97457-KY-1

Lead times may vary.
Warranty period and terms vary by country and application.